

Conductive Plastic Angle Sensor

MIDORI CP-2FBJ-6 Series



General

- Conductive Plastic Angle Sensor
- Effective Electrical Travel: 340°
- Independent Linearity: $\pm 1\%FS$, $\pm 0.5\%FS$
- Bushing Mount


CP-2FBJ-6 : Ball Bearing

CP-2FBGJ-6: Metal Sleeve Bearing & O-ring


Material

- Housing: Aluminum
- Shaft: Stainless Steel
- Bearing: CP-2FBJ-6 --- Stainless Steel
CP-2FBGJ-6 --- Copper Alloy


Dimension (mm)

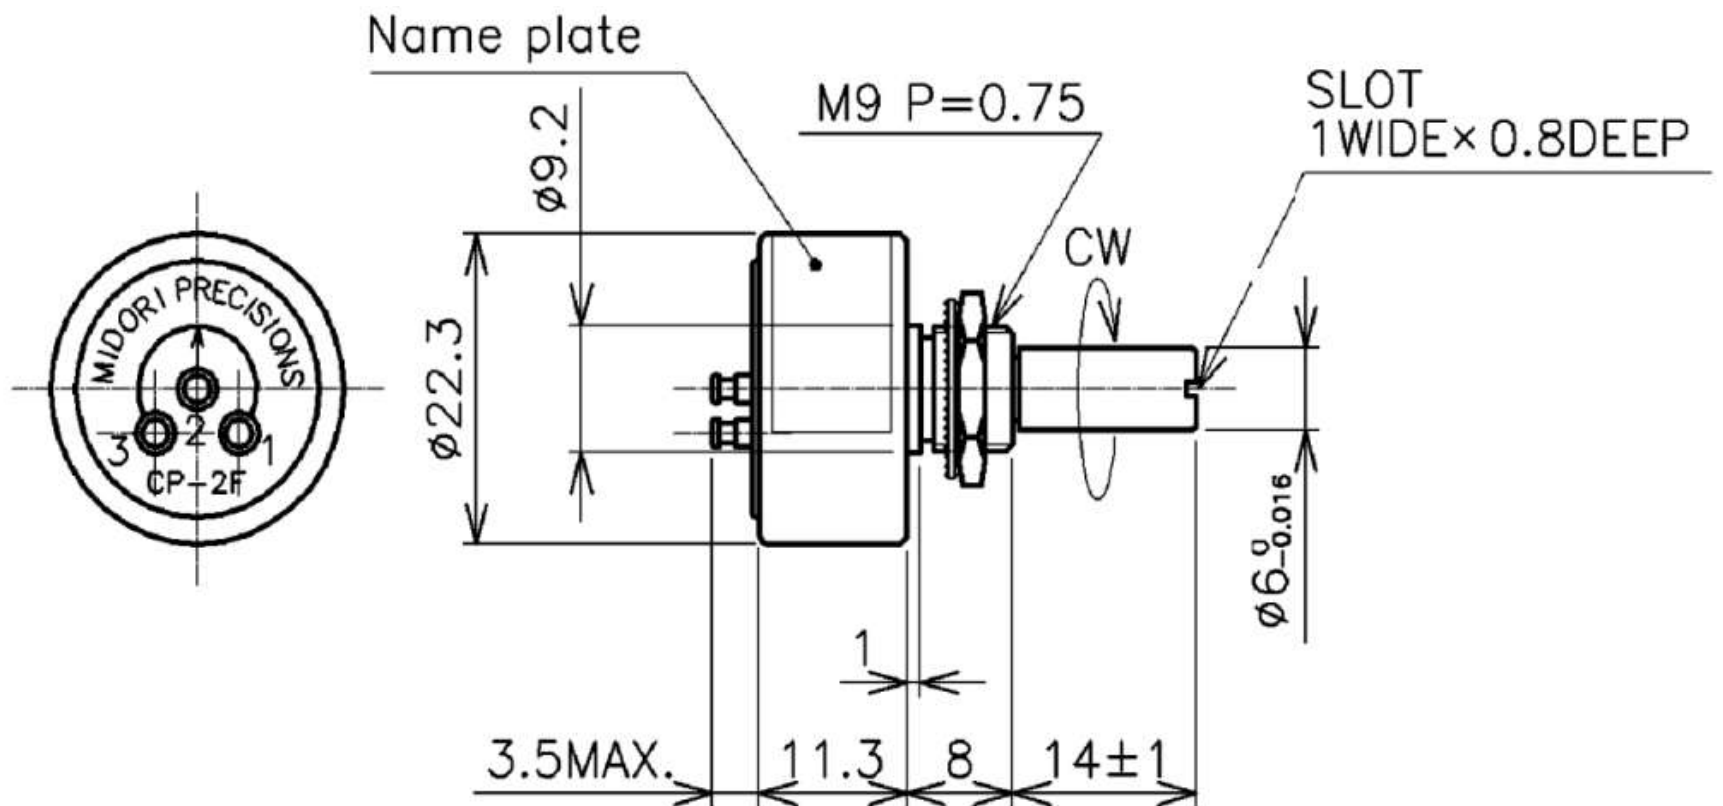


Mounting(mm)

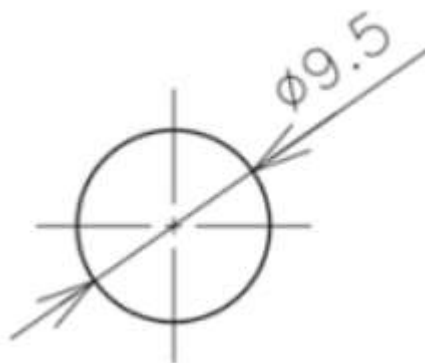

Schematic

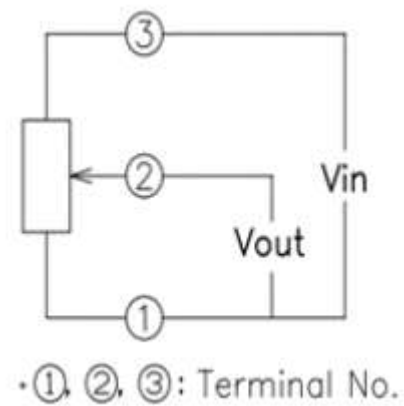

Output Characteristics

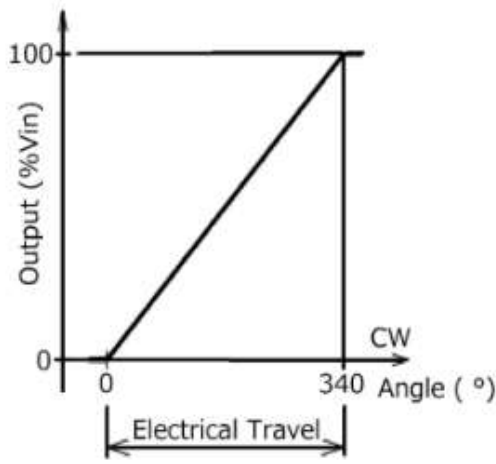

Specifications

	CP-2FBJ-6	CP-2FBGJ-6
	<Ball Bearing>	<Metal Sleeve Bearing & O-ring>
Electrical Specifications		
Effective Electrical Travel		340° +2°, -3°
Output Range		1K, 2K, 5K, 10K Ω
Total Resistance Tolerance		±20%
Independent Linearity		±1%, ±0.5%
Rated Dissipation		0.5W/ 50°C
Output Smoothness		0.1% MAX.
Insulation Resistance		100MΩMIN./DC1000V
Dielectric Strength		AC1000V/ 1Minute
TC of Resistance		±400ppm/K
Mechanical Specifications		
Total Mechanical Travel		360° Endless
Running Torque	3.5mN · m MAX.	20mN · m MAX.
Thrust Load Tolerance		1N
Radial Load Tolerance		5N
Weight		Approx. 20g
Environmental Specifications		
Life Cycles		10 Million cycles MIN.
Category Temp. Range		-40~+100°C
Storage Temp. Range		-40~+100°C
Vibration		150m/S2 2000Hz 3axis 2hours each
Shock		500m/S2 11ms 6directions 3times

Accessories

M9 Nut and Inner tooth lock washer, 1 piece each

Handling Instruction

- To avoid burnout of resistive element, do not supply more than 1mA current to terminal 2.
- Miswiring might cause burnout of resistive element.
- To reduce sliding noise, add load resistance should be more than 100times and less than 1000times of total resistance.
- Slight continuous vibration such as dither might cause short lifetime of the sensor.