

Conductive Plastic Angle Sensor

MIDORI CPP-60 Series




General

- Conductive Plastic Angle Sensor
- Effective Electrical Travel: 355°
- Independent Linearity: $\pm 0.55\%$ / $\pm 0.03\%$
- Servo Mount & Screw Mount


Material

- Housing: Aluminum
- Shaft: Stainless Steel
- Ball Bearing: Stainless Steel


Dimension (mm)

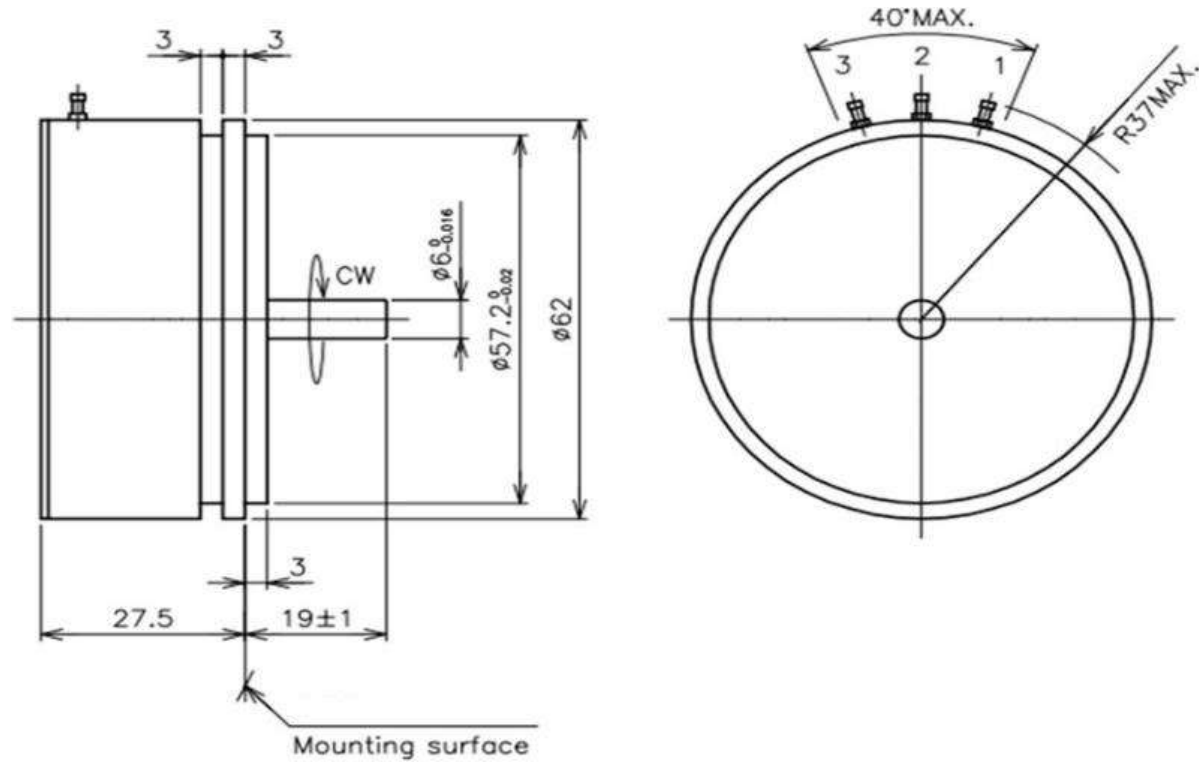

Mounting(mm)

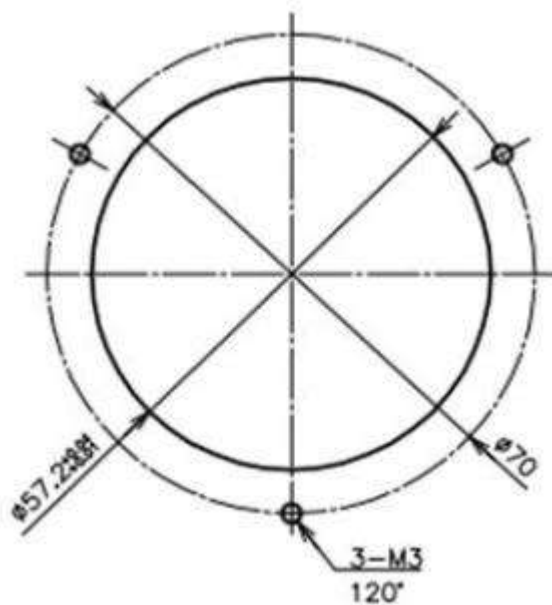


Schematic

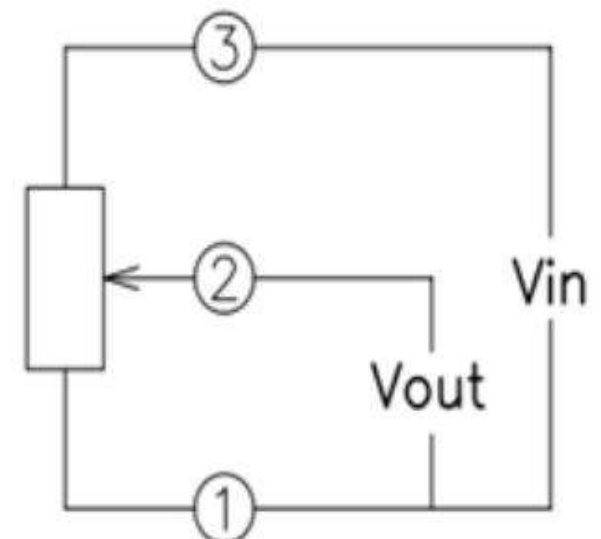

• ①, ②, ③: Terminal No.

Output Characteristics

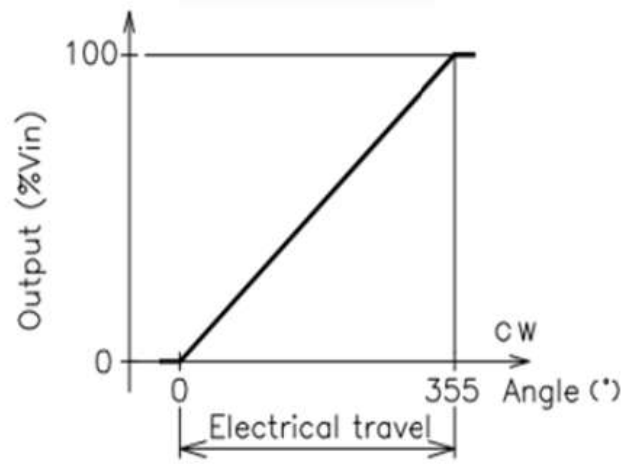

Specifications

Electrical Specifications

Effective Electrical Travel	355° +1°, -2°
Output Range	0.5K, 1K, 2K, 5K, 10K, 20K Ω
Total Resistance Tolerance	±15%
Independent Linearity	±0.05%, ±0.03%
Rated Dissipation	3W/ 70°C
Output Smoothness	0.1% MAX.
Insulation Resistance	100MΩMIN./DC1000V
Dielectric Strength	AC1000V/ 1Minute
TC of Resistance	±400ppm/K

Mechanical Specifications


Total Mechanical Travel	360° Endless
Thrust Load Tolerance	2N
Radial Load Tolerance	4N
Torque	25mN · m MAX.
Weight	Approx. 170g

Environmental Specifications

Life Cycles	10 Million cycles MIN.
Category Temp. Range	-40~+120°C
Storage Temp. Range	-40~+120°C
Vibration	150m/S ² 2000Hz 3axis 2hours each
Shock	500m/S ² 11ms 6directions 3times

Accessories

Mounting Cleats: 3 pieces

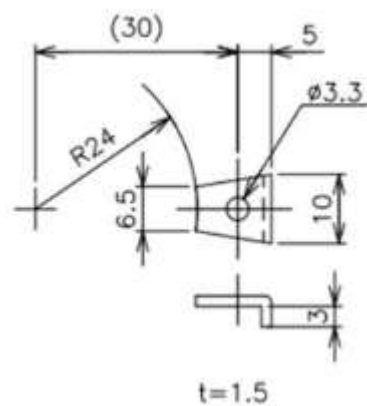

Handling Instruction

- To avoid burnout of resistive element, do not supply more than 1mA current to terminal 2.
- Miswiring might cause burnout of resistive element.
- To reduce sliding noise, add load resistance should be more than 100times and less than 1000times of total resistance.
- Slight continuous vibration such as dither might cause short lifetime of the sensor.